

Cost-effective and space-saving

Swing Gates

Service-friendly and low-maintenance!



Cost efficient swing gates with small footprint

Werra swing gates are the ideal choice for driveways where back-up space is limited due to their small space requirements and very attractive price-performance-ratio. Stable, high-quality profiles and hinges with good resistance to distortion guarantee an optimum and long period of reliable locking. All gates are

galvanised according to DIN EN 1461. The special, solvent-free coating methods according to DIN EN ISO ensure longevity of the gates and also convince in terms of environmental sustainability. The hand-operated swing gates allow quick and easy installation and are low maintenance. Among others they are ideally suited

for entrances and exits, which are not used continuously. One- or two-leaf gates in various widths and heights are available. On request with different gate fillings or prepared for on-site infill such as sheet metal, wood, etc.



SWING GATES




	SINGLE-LEAF SWING GATES	DOUBLE-LEAF SWING GATES*
	FT1-H	FT2-H PLUS
HEIGHT	650 - 2450 mm**	
CLEAR OPENING WIDTH	500 - 8000 mm	1000 - 16000 mm
FRAME	Stable pipe frame profiles	
INFILL	Bar infill, welded mesh	
OPENING ANGLE	180°	
POST	Extended for embedding in concrete according to gate size or optional bottom plates	
FEATURES	Reinforced gate holders, Aluminium gate handles, high-quality mortise locks with profile cylinders	
DRIVE UNIT	Connecting rod drive, elbow joint drive	
COATING	Galvanised DIN EN ISO 1461, galvanised and powder-coated according to RAL: RAL 6005 (moss green) und RAL 7016 (anthracite grey)***	
OPTIONS	Intercoms, lever handles and knobs, lever or panic locks, serrated strips as anti-climbing device, asymmetrical leaves (for double-leaf gates), automatic opening and closing with finger protection, slope adjustments, welded fence connections, preparation and reinforcement for customer drives	

* Three-leaf gates or special versions up to 10 m CO (single-leaf) and up to 20 m CO (double-leaf) on request

** Incl. 50 mm ground clearance

*** More than 200 other RAL colours on request



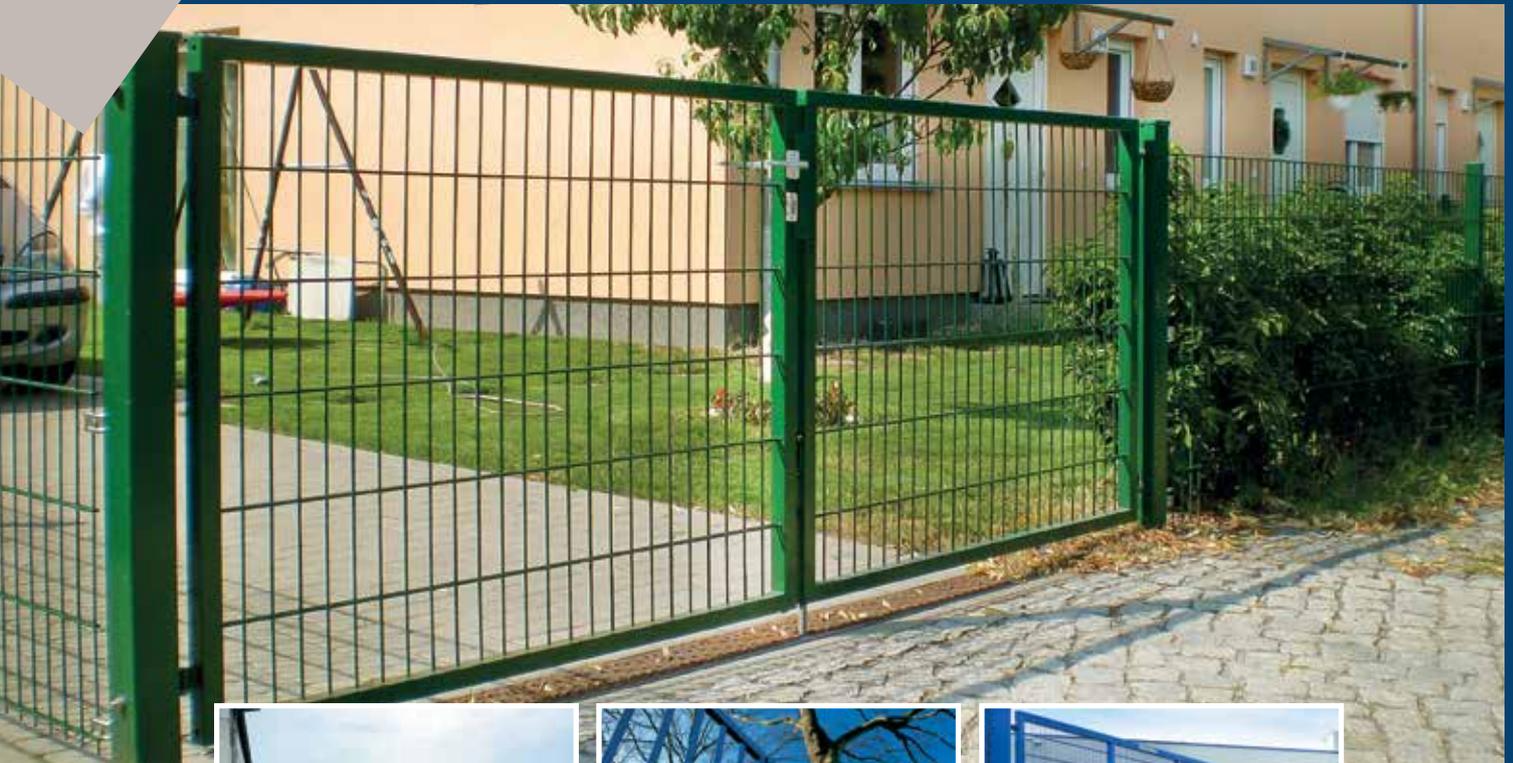

Perimeter Protection Germany GmbH
Johann-Reineke-Straße 6-10
33154 Salzkotten, Germany
Tel.: +49 (0) 5258 500 70
E-Mail: info@perimeterprotection.net
www.perimeterprotection.net



ID-5.2.26009

Versions may include optional equipment. Technical details are subject to change.